


SedCatch[™] Sediment Cage[™]* Field Grate w/ Windows Inlet Protection

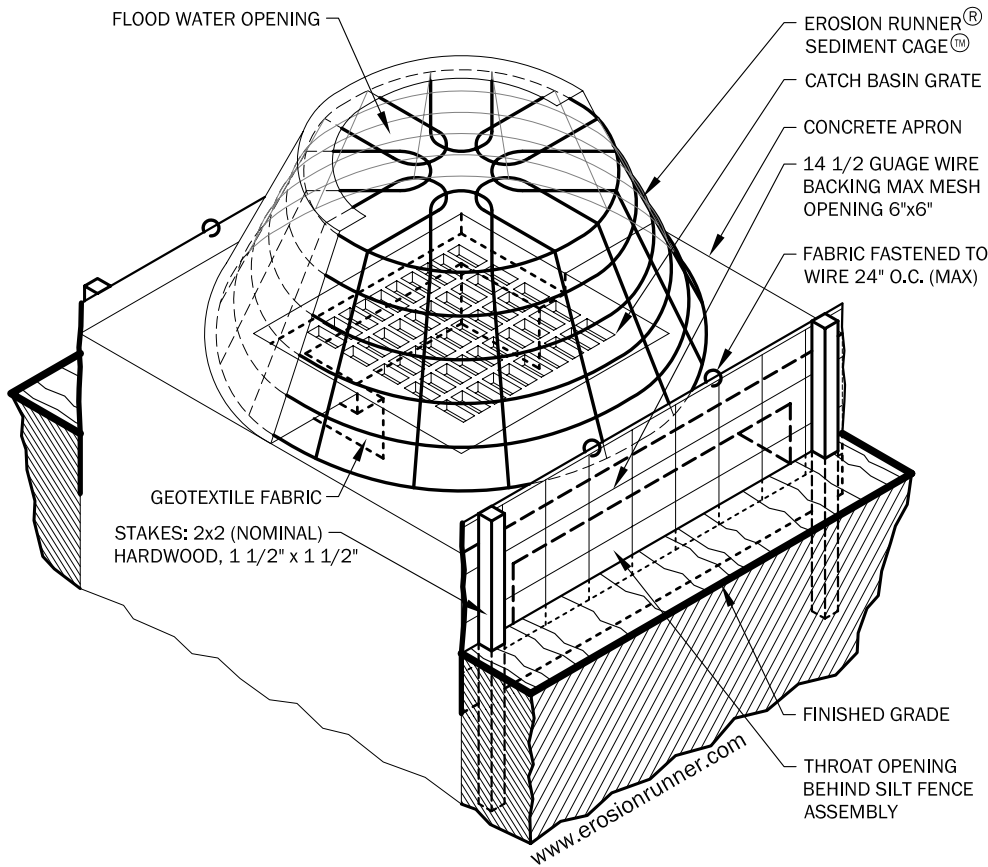


INSTALLATION INSTRUCTIONS:

1. CUT 6"x6" 42# WELDED WIRE MESH TO FIT OVER WINDOW.
2. WRAP WITH SEDCATCH[™] GEOTEXTILE.
3. BLOCK WINDOWS WITH COVER.
4. PLACE STAKES TO KEEP WINDOW COVER AGAINST STRUCTURE.
5. INSTALL SEDCATCH[™] SEDIMENT CAGE[™] AS NORMAL.

ADVANTAGES:

- FITS SQUARE GRATES FROM 22" X 22" THRU 30"X 30", FITS ROUND GRATES FROM 18" THRU 42" DIA.
- INSTALLS IN MINUTES.
- NO MAINTENANCE REQUIRED AFTER EACH RAIN.
- DOES NOT RESTRICT OPENING IN A FLOOD.
- RE-USABLE.

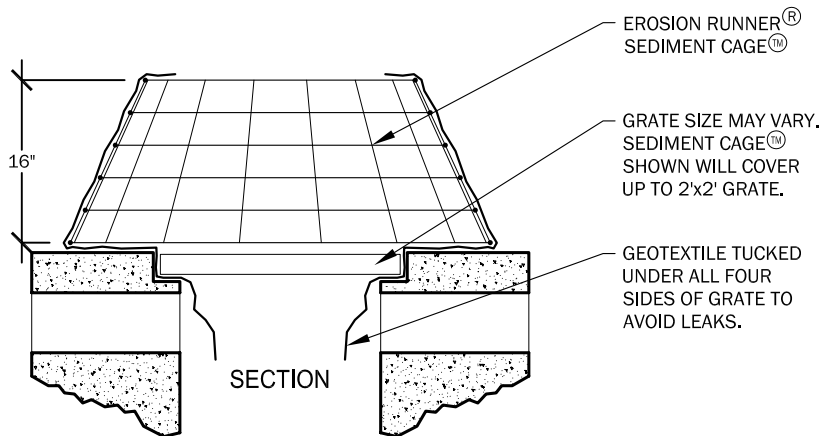

* PATENT PENDING

EROSION RUNNER[®]

8380 POINT O'WOODS
 SPRINGBORO, OH 45066
 PHONE: (937) 435-5019
 FAX: (937) 435-4208
 www.erosionrunner.com

SEDCATCH[™] SEDIMENT CAGE[™] NOTES

1. SEDCATCH[™] SEDIMENT CAGE[™] SHOULD BE INSTALLED AT THE TIME THE STRUCTURE IS SET TO KEEP JOB IN COMPLIANCE AND TO PREVENT THE NEED TO CLEAN OUT THE STORM SEWER SYSTEM AT A LATER DATE.
2. FABRIC MUST BE PINCHED UNDER GRATE TO PREVENT SEDIMENT LADEN WATER FROM ENTERING STORM SEWER SYSTEM.
3. SEDIMENT CAGE[™] DOES NOT REQUIRE REGULAR CLEANING BECAUSE THE SEDIMENT IS DEPOSITED IN THE AREA AROUND THE SEDIMENT CAGE[™] NOT ON THE SEDIMENT CAGE[™]. SEDIMENT AROUND THE SEDIMENT CAGE[™] SHOULD BE REMOVED THE SOONER OF 1.) WHEN IT IS 1/2 THE HEIGHT OF THE CAGE, OR 2.) WHEN FLOODWATERS REGULARLY OVERTOP THE UNIT.