

SedCatch[™] Sediment Cage[™]* Field Grate Inlet Protection

SIZES:

42" SEDIMENT CAGE[™]

FITS SQUARE GRATES FROM 22" X 22" THROUGH 30" X 30" & ROUND GRATES FROM 18" DIA. THROUGH 40" DIA.

52" SEDIMENT CAGE[™]

FITS SQUARE GRATES FROM 28" X 28" THROUGH 37" X 37" & ROUND GRATES FROM 36" DIA. THROUGH 50" DIA.

INSTALLATION INSTRUCTIONS:

1. REMOVE GRATE.
2. BALANCE GRATE ABOVE OPENING WITH 2X4'S PLACED ON EDGE ON OPPOSITE CORNERS.
3. TUCK FABRIC UNDER GRATE.
4. PLACE ADDITIONAL 2X4'S LAID FLAT UNDER REMAINING CORNERS OF GRATE.
5. REMOVE INITIAL 2X4'S.
6. TUCK IN REMAINING FABRIC.
7. REMOVE 2X4'S AND SEAT GRATE WITHIN OPENING.



ADVANTAGES:

- INSTALLS IN MINUTES.
- NO MAINTENANCE REQUIRED AFTER EACH RAIN.
- DOES NOT RESTRICT OPENING IN A FLOOD.
- RE-USABLE.

* PATENT PENDING

EROSION RUNNER[®]

8380 POINT O'WOODS
SPRINGBORO, OH 45066
PHONE: (937) 435-5019
FAX: (937) 435-4208
www.erosionrunner.com

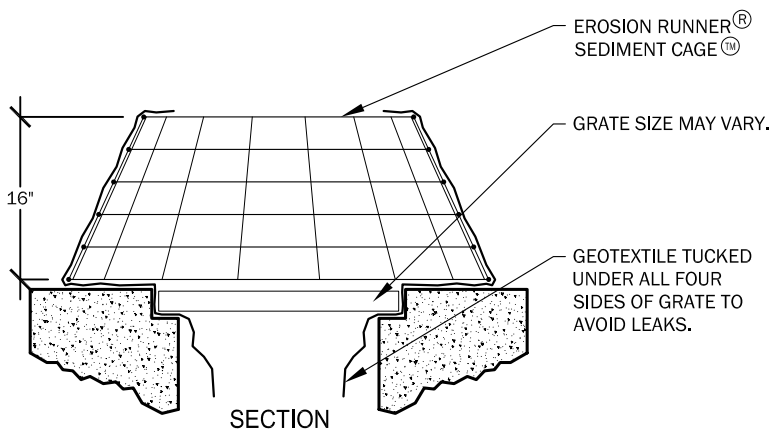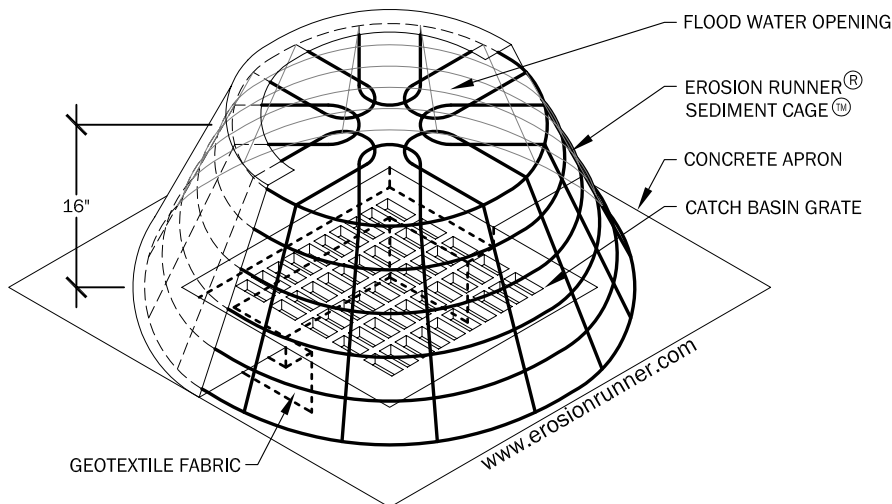

SEDCATCH[™] SEDIMENT CAGE[™] NOTES

1. SEDCATCH[™] SEDIMENT CAGE[™] SHOULD BE INSTALLED AT THE TIME THE STRUCTURE IS SET TO KEEP JOB IN COMPLIANCE AND TO PREVENT THE NEED TO CLEAN OUT THE STORM SEWER SYSTEM AT A LATER DATE.
2. FABRIC MUST BE PINCHED UNDER GRATE TO PREVENT SEDIMENT LADEN WATER FROM ENTERING STORM SEWER SYSTEM.
3. SEDIMENT CAGE[™] DOES NOT REQUIRE REGULAR CLEANING BECAUSE THE SEDIMENT IS DEPOSITED IN THE AREA AROUND THE SEDIMENT CAGE[™] NOT ON THE SEDIMENT CAGE[™]. SEDIMENT AROUND THE SEDIMENT CAGE[™] SHOULD BE REMOVED THE SOONER OF 1.) WHEN IT IS 1/2 THE HEIGHT OF THE CAGE, OR 2.) WHEN FLOODWATERS REGULARLY OVERTOP THE UNIT.